



Chamäleon GmbH
Rudolf-Diesel-Straße, 8a
69115 Heidelberg-Germany
Tel.: +49-(0)-6221 520440
Fax: +49-(0)-6221 520449
E-mail: info@chamaeleon/produktion.de
<http://www.chamaeleon/produktion.de>

TECHNICAL DATA SHEET

CHAMÄLEON AEROSOL CLEAR COAT PREMIUM

Article number:	11012
Intended use:	Car refinishing Product/Lacquer
General characteristics:	2K Clear coat provides a high gloss, is extremely scratch resistant and provides highest resistance against fuel, UV-radiation and weather influences

Product characteristics:

- quick drying-time
- excellent flow
- easy polishing
- favourable 200 ml spray can to avoid paint residues

Physical and Chemical



Characteristics

Application properties:

2-3 full spray passes, 50µ
flash-off time between coats: approx. 2 minutes
air-drying 70°F (20°C) 7h or 25 min. 140-160°F (60°C) object temperature
infra-red drying 25 min.
polishing after 7h 70°F (20°C), air-drying 45 min. 140-160°F (60°C), oven
drying or infra-red drying 30 min.



Chamäleon GmbH
Rudolf-Diesel-Straße, 8a
69115 Heidelberg-Germany
Tel.: +49-(0)-6221 520440
Fax: +49-(0)-6221 520449
E-mail: info@chamaeleon/produktion.de
http://www.chamaeleon/produktion.de

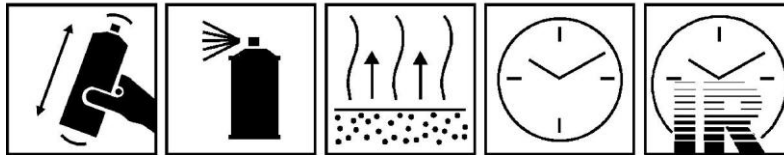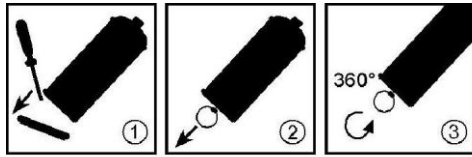

2 min


2-3=50 μ

2 min

20 °C = 7 h

25 min

60 °C = 40 min

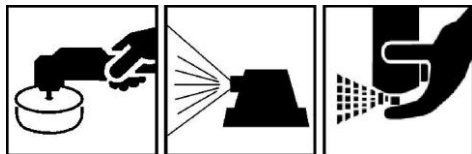

20 °C = 7 h

60 °C = 45 min

IR=25 min

Substrate:

- basecoats opaque or metallics

Preparation:

- after 30 min. air-drying time, basecoats can be re-coated with Chamäleon 2K Clear coat premium

Mixing of 2K Hi-Speed Clear coat premium with hardener:

Remove protecting cap from the bottom of the can. Take out the ring and mount the ring through the whole of the bolt.

To mix the hardener with the A-component, place can upside down on even surface, then pull the bolt at the bottom of the can with the aid of the metal ring as far as it will go.

By a following 360 ° turn the cartridge will be completely opened and the hardener will be released. By the shaking of the can the component A will be mixed with the hardener with the exact, pre-determined mixing-ratio.

- spray to test
- pot life: 24 h 70°F (20°C)



Chamäleon GmbH
Rudolf-Diesel-Straße, 8a
69115 Heidelberg-Germany
Tel.: +49-(0)-6221 520440
Fax: +49-(0)-6221 520449
E-mail: info@chamaeleon/produktion.de
<http://www.chamaeleon/produktion.de>

Important:

- for professional use only
- Thin product contains isocyanate and can cause lung or breathing problems as well as hypersensitivity reactions. Before using or working with coating materials that contains isocyanate, all safety informations on the can label and the material safety data sheet must be read. Individuals with lung or breathing problems or prior reactions to isocyanate must not be exposed to vapour or spraymist.
- the use of a **respirator mask** is necessary!
- notice EU-safety data sheet as well as handling and warning notices on the label
- shelf life: 24 months at 70°F (20°C)

For the additional information that is not included to the Technical Data Sheet apply to the supplier:

e-mail: info@chamaeleon-produktion.de

See information on safety in Safety Data Sheet.